

GTBZ16SU

Self-Propelled Telescopic Boom Lifts(Ultra Deck)



Dingli

GTBZ16SU



S. W. L	1800kg
Goods	1350kg
Max. Occupants	4



Max. Working Height	15.6m
Max. Platform Height	13.6m



Max. Horizontal Reach	8.00m
Maximum Rearward	3.50m
Platform Slider Boom	1.80m
Overall Length	7.21m
Overall Width	2.45m
Overall Height(Rails Up / Rails Down)	3.35m/2.36m
Platform Size(Length X Width)	6.70mX2.28m
Ground Clearance	0.32m
Wheel Base	3.80m
Turning Radius(Inside/Outside)	2.45m/5.50m



Turret Rotation	180°
-----------------	------



Engine		
Perkins 804D-33T	62kw/2600rpm	
Deutz TD 2.9 L4 - Option	55.4kw/2300rpm	
Fuel	Diesel	



Travel Speed(Stowed)	5.1km/h
Travel Speed(Working)	≤ 1.1km/h



Gradeability	40%
Maximum Slope	3°/5
Chassis Leveling	10






Hydraulic Tank	216L
Fuel Tank	137L



Tyre	355/65-22.5
------	-------------



Gross Weight	11500kg
--------------	---------

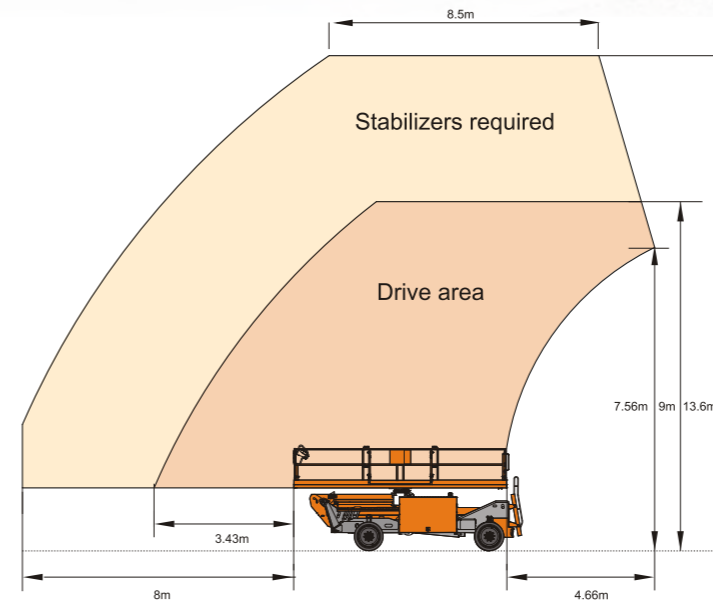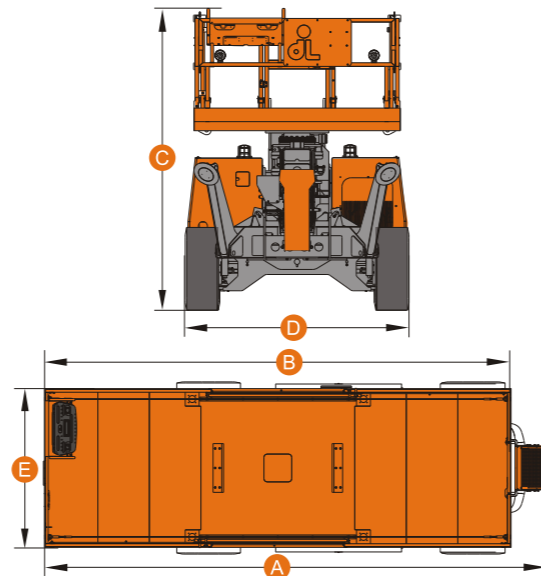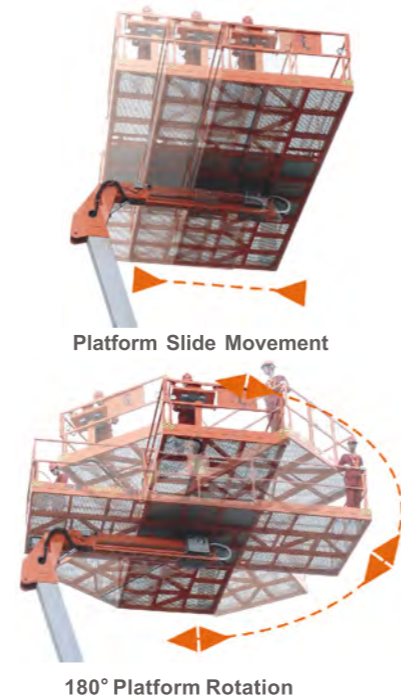

Standard Equipment

- Can Bus Technology
- Proportional Controls
- Safety Electric Pump
- Overload Sensor With Alarm
- Tilt Sensor
- 180° Platform Rotation
- Self-leveling Platform
- Onboard Diagnostic System
- Slide Platform
- Anti-restart Engine Protection
- The Glow Plugs For Cold Starting
- Chassis Auto-leveling
- Oscillating Axle
- European III Emission Engine
- Automatic Outriggers
- Hydraulic Oil Cooler
- Rough Terrain Foam-filled Tyres
- 4WD
- 4WS
- Horn
- Hour Meter

Options

- Hydraulic Generator
- Hydraulic Compressor
- Hydraulic Water Pump
- AC Power To Platform
- Hydraulic Welder
- Platform Work Lights
- European IV Emission Engine



Automatic Outriggers



Platform Self-leveling



Ultra Deck



Chassis Auto-leveling