

JCPT0807DC

Self-Propelled Scissor Lifts (Electric Motor Drive)



Dingli JCPT0807DC


	S.W.L	230kg
	S.W.L On Extension	113kg
	Max. Occupants	2
	A Working Height	7.80m
	B Platform Floor Height	5.80m
	C Overall Length	1.86m
	D Overall Width	0.76m
	Overall Height _(Rais Up)	2.18m
	E Overall Height _(Rais Down)	1.84m
	Platform Size _(Length/Width) F	1.67m×0.74m
	G Platform Extension Size	0.90m
	Ground Clearance _(Stowed/Raised)	0.083m/0.016m
	Wheelbase	1.36m
	Turning Radius _(Inside/Outside)	0m/1.64m
	Drive Motor	24V/0.5kW
	Lifting Motor	24V/2kW
	Travel Speed _(Stowed)	4.5km/h
	Travel Speed _(Raised)	0.8km/h
	Up/Down Speed	27/22sec
	Batteries	4×6V/210Ah
	Integrated Charger	24V/25A
	Gradeability	25%
	Maximum Working Slope _(CE)	1.5°/3°
	Maximum Working Slope _(ANSI)	2°/3°
	Tyres	Φ305×100mm
	Weight _(CE)	1415kg
	Weight _(ANSI)	1415kg

Standard Equipment

- Proportional Controls
- Self-lock Gate On Platform
- Automatic Pothole Protection
- Drivable At Full Height
- Onboard Diagnostic System
- Non Marking Tyre
- Automatic Brake System
- Emergency Lowering System
- Emergency Stop Button
- Cylinder Holding Valve
- Extended Platform
- Horn
- Forklift Pockets
- Charger Protection
- All Motion Alarm
- 2WD
- Safety Brackets
- Hour Meter
- Flashing Beacon
- Tilt Sensor With Alarm
- Folding Guardrails

Options

- Overload Sensor With Alarm
- AC Power To Platform
- Platform Work Lights
- Airline To Platform

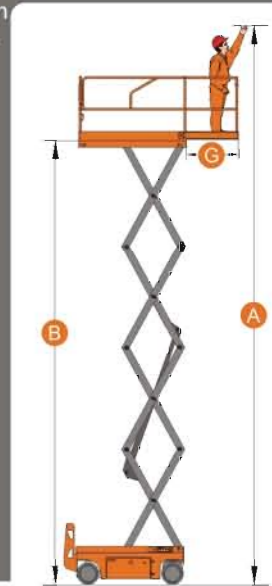

Folding Guardrails



Compact Turning Radius



Folding Guardrails



Gradeability



Swing Out Tray



Emergency Lowering System



Pothole Device



Flashing Beacon