

JCPT(OD)

Omni Direction Self-Propelled Scissor Lifts





	JCPT1013(OD)	JCPT1213(OD)
S.W.L	450kg	400kg
S.W.L On Extension	113kg	113kg
Max. Occupants	2	2
A Working Height	10.00m	12.00m
B Platform Floor Height	8.00m	10.00m
C Overall Length	2.48m	2.48m
D Overall Width	1.39m	1.39m
E Overall Height	2.38m	2.51m
Platform Size (Length/Width F)	2.27m×1.12m	2.27m×1.12m
G Platform Extension Size	0.90m	0.90m
Ground Clearance	0.10m	0.10m
Wheelbase	1.80m	1.80m
Turning Radius	0	0
Drive Motors	4×48VDC/1.5kW	4×48VDC/1.5kW
Lifting Motor	48VDC/2kW	48VDC/2kW
Travel Speed (Stowed)	3.5km/h	3.5km/h
Travel Speed (Raised)	0.8km/h	0.8km/h
Up/Down Speed	62/65sec	79/72sec
Batteries	8×6V/225Ah	8×6V/225Ah
Integrated Charger	48V/25A	48V/25A
Maximum Working Slope	2°/3°	2°/3°
Tyres	Φ460×240mm	Φ460×240mm
Weight	3120kg	3280kg

Standard Equipment

- Proportional Controls
- Self-lock Gate On Platform
- Automatic Brake System
- Drivable At Full Height
- Onboard Diagnostic System
- Non Marking Tyre
- Tilt Sensor With Alarm
- Emergency Lowering System
- Emergency Stop Button
- Cylinder Holding Valve
- Extended Platform
- Horn
- Forklift Pockets
- Charger Protection
- All Motion Alarm
- 4WD
- Safety Brackets
- Hour Meter
- Flashing Beacon

Options

- Overload Sensor With Alarm
- AC Power To Platform
- Platform Work Lights
- Airline To Platform

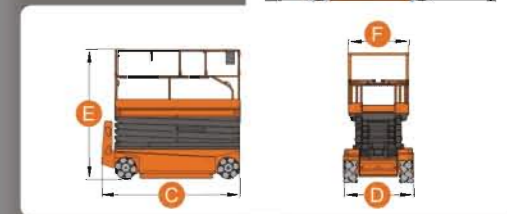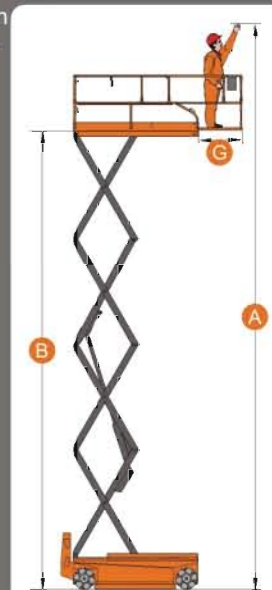

Swing Out Tray



Slide-out Components Tray



Extended Platform



Emergency Lowering System



Omni-direction Driving System

