

# JCPT(DC)

## Self-Propelled Scissor Lifts (Electric Motor Drive)



### Dingli


	JCPT1412DC	JCPT1612DC	JCPT1614DC
S.W.L.(CE)	320kg	200kg	/
S.W.L.(ANSI)	250kg	/	227kg
S.W.L On Extension	113kg	113kg	113kg
Max. Occupants	3	2	2
<b>A</b> Working Height	13.80m	15.70m	15.70m
<b>B</b> Platform Floor Height	11.80m	13.70m	13.70m
<b>C</b> Overall Length	2.48m	2.84m	2.84m
<b>D</b> Overall Width	1.19m	1.25m	1.39m
Overall Height <sub>(Rails Up)</sub>	2.59m	2.59m	2.59m
<b>E</b> Overall Height <sub>(Rails Down)</sub>	2.05m	2.05m	2.05m
Platform Size <sub>(Length/Width)</sub> <b>F</b>	2.27m×1.12m	2.64m×1.12m	2.64m×1.12m
<b>G</b> Platform Extension Size	0.90m	0.90m	0.90m
Ground Clearance <sub>(Stowed/Raised)</sub>	0.10m/0.019m	0.10m/0.019m	0.10m/0.019m
Wheelbase	1.87m	2.22m	2.22m
Turning Radius <sub>(Inside/Outside)</sub>	0m/2.20m	0m/2.65m	0m/2.70m
Drive Motor	24V/1.5kW	24V/1.5kW	24V/1.5kW
Lifting Motor	24V/4.5kW	24V/4.5kW	24V/4.5kW
Travel Speed <sub>(Stowed)</sub>	4.0km/h	4.0km/h	4.0km/h
Travel Speed <sub>(Raised)</sub>	0.8km/h	0.8km/h	0.8km/h
Up/Down Speed	84/38sec	88/60sec	88/60sec
Batteries	4×12V/300Ah	4×12V/300Ah	4×12V/300Ah
Integrated Charger	24V/25A	24V/25A	24V/25A
Gradeability	25%	25%	25%
Maximum Working Slope <sub>(CE)</sub>	1.5°/3°	1.5°/3°	/
Maximum Working Slope <sub>(ANSI)</sub>	2°/3°	/	2°/3°
Tyres	Φ381×127mm	Φ381×127mm	Φ381×127mm
Weight <sub>(CE)</sub>	2880kg	3180kg	/
Weight <sub>(ANSI)</sub>	3100kg	/	3320kg

### Standard Equipment

- Proportional Controls
- Self-lock Gate On Platform
- Automatic Pothole Protection
- Drivable At Full Height
- Onboard Diagnostic System
- Non Marking Tyre
- Automatic Brake System
- Emergency Lowering System
- Emergency Stop Button
- Cylinder Holding Valve
- Extended Platform
- Horn
- Forklift Pockets
- Charger Protection
- All Motion Alarm
- 2WD
- Safety Brackets
- Hour Meter
- Flashing Beacon
- Tilt Sensor With Alarm
- Folding Guardrails

### Options

- Overload Sensor With Alarm
- AC Power To Platform
- Platform Work Lights
- Airline To Platform

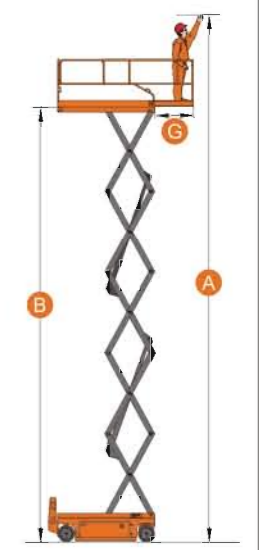

Folding Guardrails



Safety Bracket



Compact Turning Radius



Gradeability



Swing Out Tray



Emergency Lowering System



Extended Platform



Flashing Beacon