

JCPT(HD)

Self-Propelled Scissor Lifts (Hydraulic Motor Drive)



JCPT1412HD

JCPT1612HD

JCPT1614HD



S.W.L.(CE)	320kg	200kg	/
S.W.L.(ANSI)	250kg	/	227kg
S.W.L On Extension	113kg	113kg	113kg
Max. Occupants	3	2	2



A Working Height	13.80m	15.70m	15.70m
B Platform Floor Height	11.80m	13.70m	13.70m



C Overall Length	2.48m	2.84m	2.84m
D Overall Width	1.19m	1.25m	1.39m
Overall Height _(Rails Up)	2.59m	2.59m	2.59m
E Overall Height _(Rails Down)	2.05m	2.05m	2.05m
Platform Size _(Length/Width) F	2.27m×1.12m	2.64m×1.12m	2.64m×1.12m
G Platform Extension Size	0.90m	0.90m	0.90m
Ground Clearance _(Stowed/Raised)	0.10m/0.019m	0.10m/0.019m	0.10m/0.019m
Wheelbase	1.87m	2.22m	2.22m
Turning Radius _(Inside/Outside)	0m/2.20m	0m/2.65m	0m/2.70m



Drive/Lifting Motor	24V/4.5kW	24V/4.5kW	24V/4.5kW
Travel Speed _(Stowed)	3.5km/h	3.5km/h	3.5km/h
Travel Speed _(Raised)	0.8km/h	0.8km/h	0.8km/h
Up/Down Speed	84/38sec	88/60sec	88/60sec



Batteries	4×12V/300Ah	4×12V/300Ah	4×12V/300Ah
Integrated Charger	24V/25A	24V/25A	24V/25A



Gradeability	25%	25%	25%
Maximum Working Slope _(CE)	1.5°/3°	1.5°/3°	/
Maximum Working Slope _(ANSI)	2°/3°	/	2°/3°



Tyres	Φ381×127mm	Φ381×127mm	Φ381×127mm
-------	------------	------------	------------




Weight _(CE)	2840kg	3130kg	/
Weight _(ANSI)	3060kg	/	3280kg

Standard Equipment

- Proportional Controls
- Self-lock Gate On Platform
- Automatic Pothole Protection
- Drivable At Full Height
- Onboard Diagnostic System
- Non Marking Tyre
- Automatic Brake System
- Emergency Lowering System
- Emergency Stop Button
- Cylinder Holding Valve
- Extended Platform
- Horn
- Forklift Pockets
- Charger Protection
- All Motion Alarm
- 2WD
- Safety Brackets
- Hour Meter
- Flashing Beacon
- Tilt Sensor With Alarm
- Folding Guardrails

Options

- Overload Sensor With Alarm
- AC Power To Platform
- Platform Work Lights
- Airline To Platform

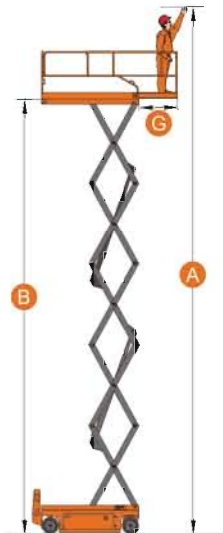

Folding Guardrails



Safety Bracket



Compact Turning Radius



Gradeability



Swing Out Tray



Emergency Lowering System



Extended Platform



Flashing Beacon