

# JCPT(HD)

## Self-Propelled Scissor Lifts (Hydraulic Motor Drive)





	JCPT1912HD	JCPT2212HD
S.W.L.	600kg	450kg
S.W.L. On Extension	113kg	113kg
Max. Occupants	2	2
<b>A</b> Working Height	19.00m	22.00m
<b>B</b> Platform Floor Height	17.00m	20.00m
<b>C</b> Overall Length	4.50m	4.50m
<b>D</b> Overall Width	1.22m	1.22m
<b>E</b> Overall Height <sub>(Rails Up)</sub>	3.43m	3.71m
Overall Height <sub>(Rails Down)</sub>	2.59m	2.87m
<b>F</b> Platform Size <sub>(Length/Width)</sub>	3.98m×1.19m	3.98m×1.19m
<b>G</b> Platform Extension Size	1.50m	1.50m
Ground Clearance <sub>(Stowed)</sub>	0.19m	0.19m
Ground Clearance <sub>(Raised)</sub>	0.025m	0.025m
Wheelbase	3.20m	3.20m
Turning Radius <sub>(Inside / Outside)</sub>	0.33m/3.64m	0.33m/3.64m
Drive/Lifting Motor	48V/8kW	48V/8kW
Travel Speed <sub>(Stowed)</sub>	1.5km/h	1.5km/h
Travel Speed <sub>(Raised)</sub>	0.15km/h	0.15km/h
Up/Down Speed	120/90sec	120/90sec
Batteries	48V/560Ah	48V/560Ah
Integrated Charger	48V/50A	48V/50A
Gradeability	25%	25%
Maximum Working Slope <sub>(Indoor/Outdoor)</sub>	1.5°/0.3°	1.5°/0.3°
Tyres	22×9-16	22×9-16
Weight	9025kg	9755kg

### Standard Equipment

- Proportional Controls
- Self-lock Gate On Platform
- Automatic Pothole Protection
- Onboard Diagnostic System
- Non Marking Tyre
- Automatic Brake System
- Emergency Lowering System
- Emergency Stop Button
- Cylinder Holding Valve
- Extended Platform
- Horn
- Automatic Leveling Hydraulic Outriggers
- Charger Protection
- All Motion Alarm
- 2WD
- Safety Brackets
- Hour Meter
- Flashing Beacon
- Tilt Sensor With Alarm
- Folding Guardrails

### Options

- Overload Sensor With Alarm
- AC Power To Platform
- Platform Work Lights
- Airline To Platform

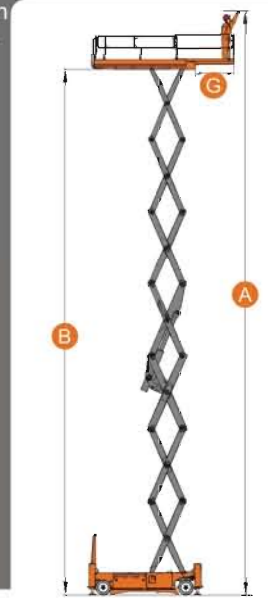

Pothole Device



Compact Turning Radius



Automatic Leveling  
Outriggers



Emergency Lowering System



Removeable Battery Cover



Platform Control



Folding Guardrails



Safety Bracket