

# JCPT(RT)

## Self-Propelled Rough-Terrain Scissor Lifts



### Dingli


	JCPT1923RT	JCPT2223RT
S.W.L	750kg	750kg
S.W.L On Extension	500kg	500kg
Max. Occupants	4	4
<b>A</b> Working Height	19.00m	22.00m
<b>B</b> Platform Floor Height	17.00m	20.00m
<b>C</b> Overall Length	4.80m	4.80m
<b>D</b> Overall Width	2.27m	2.27m
<b>E</b> Overall Height (Rails Up)	3.44m	3.68m
Overall Height (Rails Down)	2.60m	2.84m
<b>F</b> Platform Size (Length/Width)	4.35m×1.85m	4.35m×1.85m
<b>G</b> Platform Extension Size	2.00m	2.00m
Ground Clearance	0.22m	0.22m
Wheelbase	3.13m	3.13m
Turning Radius (Inside / Outside)	2.15m/5.35m	2.15m/5.35m
Engine	Kubota v2403-M-DI 36.5kW/2600rpm	
Travel Speed (Stowed)	6.0km/h	6.0km/h
Travel Speed (Raised)	0.7km/h	0.7km/h
Up/Down Speed	75/60sec	75/60sec
Gradeability	30%	30%
Maximum Working Slope	3°/3°	3°/3°
Hydraulic Tank	140L	140L
Diesel Tank	100L	100L
Tyres	30×12-20	30×12-20
Weight	11340kg	12040kg

### Standard Equipment

- Proportional Controls
- Self-lock Gate On Platform
- 4WD
- Self-leveling Hydraulic Outriggers
- Automatic Brake System
- Cylinder Holding Valve
- Onboard Diagnostic System
- Tilt Sensor With Alarm
- All Motion Alarm
- Horn
- Hour Meter
- Safety Brackets
- Folding Guardrails
- Automatic Single Roll Out Deck
- Flashing Beacon
- Slide-out Engine Tray
- Emergency Stop Button
- Anti-restart Engine Protection
- European III Emission Engine
- Hydraulic Oil Cooler
- Vertical Style Lift Gate

### Options

- Overload Sensor With Alarm
- AC power On The Platform
- Hydraulic Generator
- Hydraulic Welder
- Hydraulic Compressor
- Hydraulic Water Pump
- Platform Work Lights
- Non Marking Tyre

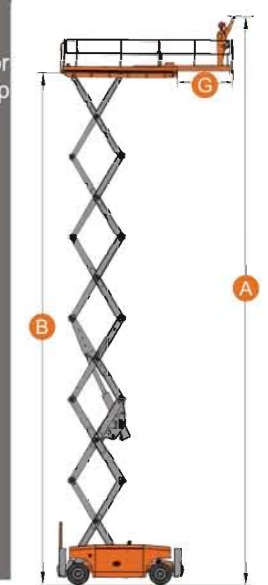

Automatic Leveling Outriggers



Flashing Beacon



Vertical Style Lift Gate



Gradeability



Extended Platform



Folding Guardrails



Swing-out Engine Tray



Safety Bracket