

# JCPT(DC)

## Self-Propelled Scissor Lifts (Electric Motor Drive)



JCPT0607DCS



S.W.L	240kg
S.W.L On Extension	100kg
Max. Occupants	2



<b>A</b> Working Height <sub>(CE/ANSI)</sub>	5.60m/5.90m
<b>B</b> Platform Floor Height <sub>(CE/ANSI)</sub>	3.60m/3.90m



<b>C</b> Overall Length <sub>(With Ladder)</sub>	1.44m
Overall Length <sub>(Without Ladder)</sub>	1.29m
<b>D</b> Overall Width	0.76m
<b>E</b> Overall Height <sub>(Rails Up)</sub>	2.03m
Overall Height <sub>(Rails Down)</sub>	1.67m
Platform Size <sub>(Length/Width)</sub> <b>F</b>	1.29x0.70m
<b>G</b> Platform Extension Size	0.60m
Ground Clearance <sub>(Stowed)</sub>	0.06m
Ground Clearance <sub>(Raised)</sub>	0.015m
Wheelbase	1.05m
Turning Radius <sub>(Inside/Outside)</sub>	0.40m/1.55m



Drive Motors	2x24VDC/0.4kW
Lifting Motor	24VDC/0.8kW



Travel Speed <sub>(Stowed)</sub>	4.0km/h
Travel Speed <sub>(Raised)</sub>	1.1km/h
Up/Down Speed	32/27sec



Batteries	2x12V/85Ah
Integrated Charger	24V/10A



Gradeability	25%
Maximum Working Slope <sub>(CE)</sub>	1.5°/3°
Maximum Working Slope <sub>(ANSI)</sub>	2°/3°




Tyres	φ 230x80mm
-------	------------



Weight <sub>(CE/ANSI)</sub>	880kg
-----------------------------	-------

### Standard Equipment

- Proportional Controls
- Self-lock Gate On Platform
- Automatic Pothole Protection
- Onboard Diagnostic System
- Non Marking Tyre
- Automatic Brake System
- Emergency Lowering System
- Emergency Stop Button
- Cylinder Holding Valve
- Extended Platform
- Horn
- Forklift Pockets
- Charger Protection
- All Motion Alarm
- 2WD
- Safety Brackets
- Hour Meter
- Flashing Beacon
- Tilt Sensor With Alarm
- Folding Guardrails

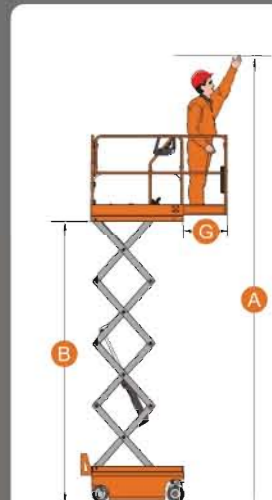

Compact Turning Radius



Pothole Device



Touch Display Screen



Gradeability



Extended Platform



Folding Guardrails



Slide Out Tray



Safety Bracket